


Ultra Thin Slim LED Floodlight

High Efficient | High security | Eco-friendly | Low maintenance

This Ultra Thin Slim LED Floodlight series provides instant illumination to a range of commercial outdoor spaces with a weatherproof rating of IP66.

It is constructed from die-cast aluminium alloy and features a toughened tempered glass to protect the smd led chips.

Available in 10W, 20W, 30W, 50W and 100W variants and with colour temperatures of warm or cold white.

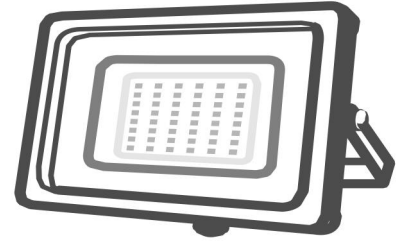






Features:

- ✓ IP65 / IP66 rated
- ✓ Diecast aluminium body shell
- ✓ Tempered glass
- ✓ 180° adjustable bracket
- ✓ Energy efficient: In the same brightness, can save up to 70% electricity.
- ✓ High luminous efficiency
- ✓ Highly secure, small radiation
- ✓ Healthy light: No (UV IR) radiation, no pollution, no radiation
- ✓ Easy to install and low maintenance cost
- ✓ Green and environment protection: No Hg and heavy metal, recyclable, no pollution and electromagnetic interference.

Applications:

Bridge night scape lighting, Parking lot lighting, Landscape lighting, Fountain lighting, Stage lighting, Billboards light, Advertising board lighting, Greenery landscape lighting, Hotel, Facilities a culture lamp lighting and other specialized facilities

Specifications:

| Code | Pic | Lumens | CCT | LED Chips | CRI | Power | Dimension |
|-----------|-------------------------------------------------------------------------------------|--------------------------------|-----------------------------------------------|-----------------------------------------|-----|-------------------------------|--------------|
| | | lm | K | | | | |
| SPL-2010 |  | 900-1000 / 1100-1200 | 2700-3500 / 4000-4500 / 6000-6500 | SANAN SMD2835 / PHILIPS UXEON3030 | 80+ | 180-265V 50/60Hz AC PF>0.9 | 112*85*30mm |
| SPL-2020 |  | 1800-2000 / 2200-2400 | | | | | 160*120*35mm |
| SPL-2030 |  | 2700-3000 / 3300-3600 | | | | | 190*145*35mm |
| SPL-2050 |  | 4500-5000 / 5500-6000 | | | | | 215*165*35mm |
| SPL-20100 |  | 9000-10000 / 11000-12000 | | | | | 370*265*35mm |